


# 36W LED Panel - Lite, 600x600mm, 860 with Driver



## Order Code: PNL048-KIT01


### Photometric Data

Lumens	3500
Colour Temperature (K)	5900 - 6100
Colour Rendering Index (CRI)	80-89
SDCM	<4
Rated Life L80/B50 at 25°C	30000
Beam Angle (°)	120 x 120
UGR	<21
Light Distribution	Symmetric

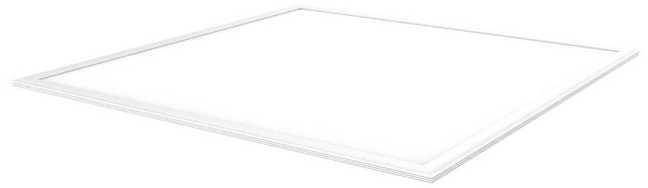

### Electrical Data

Input (W)	40
Input (V) ±10%	220 - 240
Voltage Type	AC
Input Current (A)	0.19
Power Factor	0.9
THD (%)	<15
Inrush (A) (peak)	60
No. Per C16 Breaker	48
Type of Control Gear	LED Operating Device Current-Controlled
Energy Efficiency Class (EEC)	A++, A+, A (LED)
Electrical Class	II
Connector Type	Flying Lead With Plug
Short Circuit Protection	Yes
Thermal Overload Protection	Yes
Non-dimmable	Yes

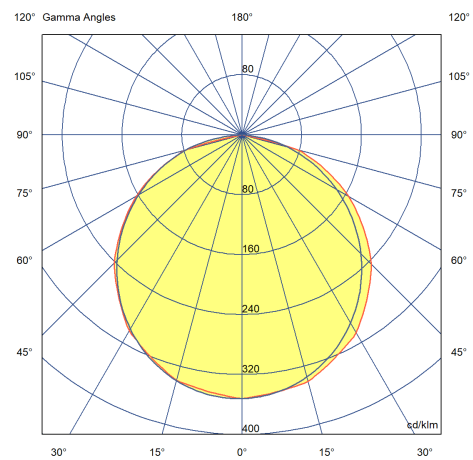

### Physical Data

Housing Colour	White
Length (mm)	595
Width (mm)	595
Height/Depth (mm)	10
Warranty (year)	3
Lens Type	Polycarbonate
Case Material	Aluminium
Weight (kg)	3
Suitable for ceiling mounting	Yes
Suitable for built-in mounting	Yes
Built-in height (mm)	50
Lamp Type	LED Not Exchangeable
Housing Material	Aluminium
Cover Material	Opal Plastic

### Environmental Data

IP Rating	IP40
Ambient Rated Temperature Range (°C)	-10 - 40



30,000  
Hours



3  
Years  
Warranty

# 36W LED Panel - Lite, 600x600mm, 860 with Driver



**Order Code: PNL048-KIT01**

## Accessories

EMG013 - 3W LED Emergency Downlight

EMG018 - Emergency Remote Pack

ACS057 - Surface Mount Box for 600 x 600mm Panel